



MMG Canada Limited

F01H

Material Type: Nickel-Zinc Ferrite

Properties: Good Q at high frequency
Perminvar ferrite
Low loss factor at high frequency

Frequency Range: 500 kHz to 20 MHz (subject to application)

Typical Application: Filters, high Q inductors, RF frequency tuned circuits and EMI suppression

Standard Geometries: Toroids, baluns and rod cores
Additional shapes are available upon request



Parameter	Symbol	Standard Test Conditions	Unit	Value
Initial Permeability (nominal)	μ_i	B < 0.1 mT f = 10 kHz T = 25°C	-	125
Saturation Flux Density (typical)	B_s	H = 4000 A/m (50 Oe) T = 25°C	mT	315
Remanent Flux Density (typical)	B_r	H ~ 0 A/m (from near saturation) f = 10 kHz T = 25°C	mT	170
Coercivity (typical)	H_c	B ~ 0 mT (from near saturation) f = 10 kHz T = 25°C	A/m	120
Loss Factor (maximum)	$\frac{\tan \delta}{\mu_i}$	B < 0.1 mT f = 2 MHz T = 25°C	10^{-6}	150
Curie Temperature (minimum)	T_c	B < 0.1 mT f = 10 kHz	°C	380
Resistivity (typical)	ρ	E = 1 V/cm T = 25°C	$\Omega \cdot \text{cm}$	1×10^7

* Data was derived from measurements made on a standard test toroid core with an outside diameter of 30 mm







MMG Canada Limited

F01H


Dynamic Magnetisation Curve

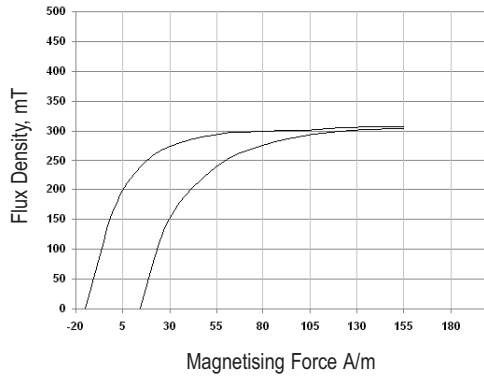


Permeability vs Temperature

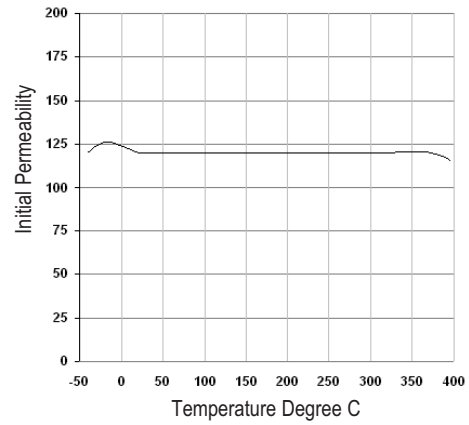

Permeability vs Frequency

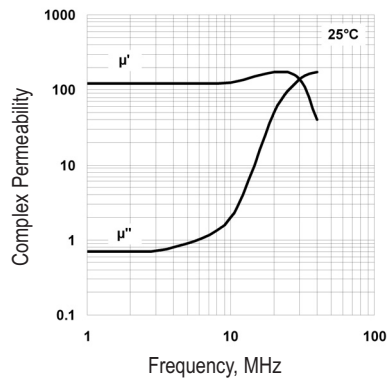

Impedance vs Frequency

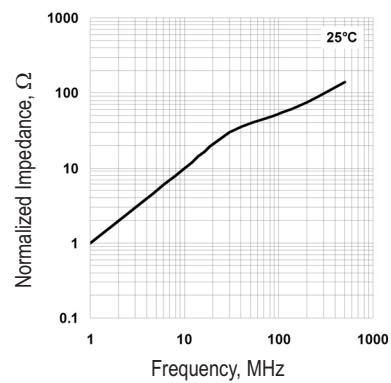

Loss Factor vs Frequency

