

F21

Material Type: Nickel-Zinc Ferrite

Properties: Very high Q at high frequency
Perminvar ferrite
Good stability of inductance

Frequency Range: 1 to 40 MHz (subject to application)

Typical Application: Antenna, filters and RF frequency tuned circuits

Standard Geometries: Toroids, baluns and rods
Additional shapes are available upon request




| Parameter | Symbol | Standard Test Conditions | | | Unit | Value | | |
|--------------------------------------|-----------------------------|----------------------------------|------------|----------|------------|--------------------------|-----------------|------|
| Initial Permeability (nominal) | μ_i | B < 0.1 mT | f = 10 kHz | T = 25°C | - | 40 | | |
| Saturation Flux Density (typical) | B_s | H = 4000 A/m (50 Oe) | | | T = 25°C | mT | 240 | |
| Remanent Flux Density (typical) | B_r | H ~ 0 A/m (from near saturation) | | | f = 10 kHz | T = 25°C | mT | 135 |
| Coercivity (typical) | H_c | B ~ 0 mT (from near saturation) | | | f = 10 kHz | T = 25°C | A/m | 1200 |
| Loss Factor (maximum) | $\frac{\tan \delta}{\mu_i}$ | B < 0.1 mT | f = 40 MHz | T = 25°C | 10^{-6} | 75 | | |
| Curie Temperature (minimum) | T_c | B < 0.1 mT | f = 10 kHz | | °C | 300 | | |
| Resistivity (typical) | ρ | E = 1 V/cm | | | T = 25°C | $\Omega \cdot \text{cm}$ | 1×10^6 | |

* Data was derived from measurements made on a standard test toroid core with an outside diameter of 30 mm




MMG Canada Limited

Permeability vs Temperature

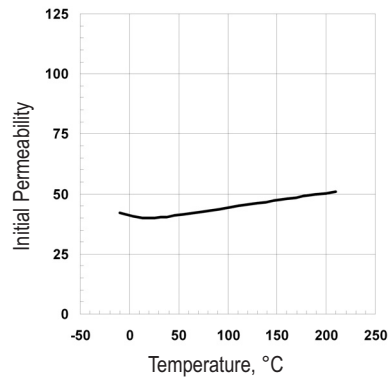

Loss Factor vs Frequency

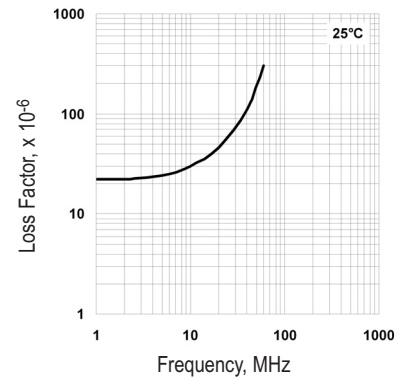

Permeability vs Frequency

