



MMG Canada Limited

F52J

Material Type: Nickel-Zinc Ferrite

Properties: Good permeability
Low losses up to 2 MHz
High impedance above 20 MHz

Frequency Range: 100 kHz to 2 MHz (subject to application)

Typical Application: Common mode chokes, filters and EMI suppression

Standard Geometries: Toroids, squaroids, baluns and multi-aperture cores
Additional shapes are available upon request



Parameter	Symbol	Standard Test Conditions	Unit	Value
Initial Permeability (nominal)	μ_i	$B < 0.1 \text{ mT}$ $f = 10 \text{ kHz}$ $T = 25^\circ\text{C}$	-	850
Saturation Flux Density (typical)	B_s	$H = 1200 \text{ A/m (15 Oe)}$ $T = 25^\circ\text{C}$	mT	350
Remanent Flux Density (typical)	B_r	$H \sim 0 \text{ A/m (from near saturation)}$ $f = 10 \text{ kHz}$ $T = 25^\circ\text{C}$	mT	170
Coercivity (typical)	H_c	$B \sim 0 \text{ mT (from near saturation)}$ $f = 10 \text{ kHz}$ $T = 25^\circ\text{C}$	A/m	32
Loss Factor (maximum)	$\frac{\tan \delta}{\mu_i}$	$B < 0.1 \text{ mT}$ $f = 2 \text{ MHz}$ $T = 25^\circ\text{C}$	10^{-6}	50
Curie Temperature (minimum)	T_c	$B < 0.1 \text{ mT}$ $f = 10 \text{ kHz}$	$^\circ\text{C}$	160
Resistivity (typical)	ρ	$E = 1 \text{ V/cm}$ $T = 25^\circ\text{C}$	$\Omega \cdot \text{cm}$	$> 10^5$

* Data was derived from measurements made on a standard test toroid core with an outside diameter of 30 mm







MMG Canada Limited

F52J


Dynamic Magnetisation Curve

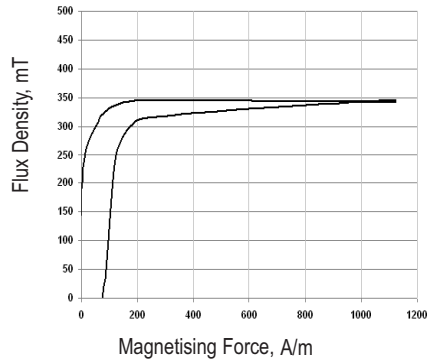


Permeability vs Temperature

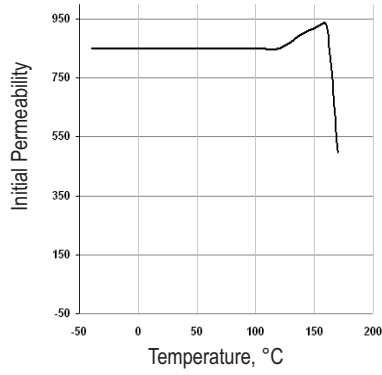

Loss Factor vs Frequency

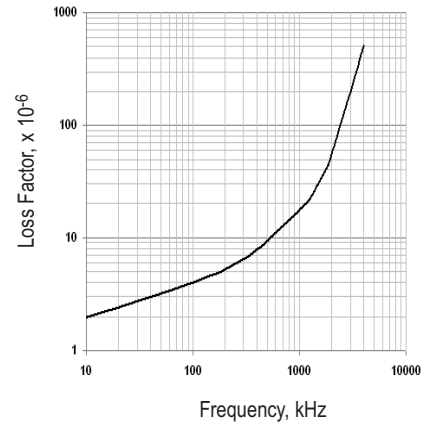

Permeability vs Frequency

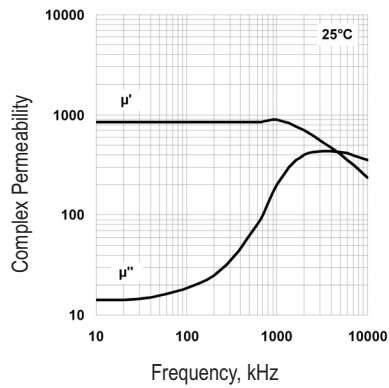

Impedance vs Frequency

