

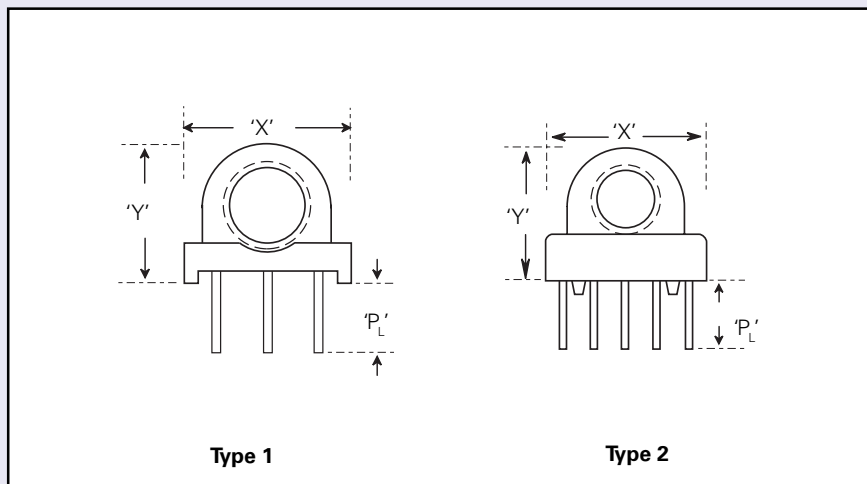
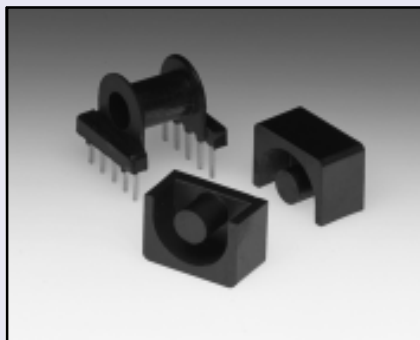


EP Coilformers 59-8XX-

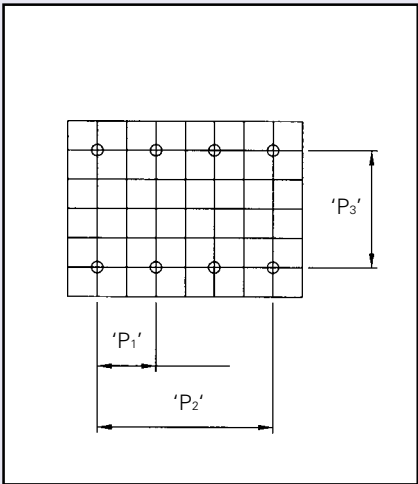

Part No.	Type	Dimensions			Winding Data		No. of sections
		'X'	'Y'	'Z'	A _N (mm ²)	I _N (mm)	
59-810-64	1	9.10	785	730	3.7	179	1
59-811-64	1	9.10	785	730	1.6	179	2
59-820-64	3	10.90	10.30	10.90	11.4	21.5	1
59-821-64	3	10.90	10.30	10.90	5.0	21.5	2
59-801-64	1	12.50	10.80	13.40	13.8	23.8	1
59-803-64	1	12.50	10.80	13.40	7.5	23.8	2
59-805-64	2	12.50	10.80	13.40	13.8	23.8	1
59-806-64	2	12.50	10.80	13.40	7.5	23.8	2
59-830-64	3	18.85	14.0	18.85	18.8	28.8	1
59-831-64	3	18.85	14.0	18.85	8.9	28.8	2
59-840-64	3	24.55	1790	21.35	33.8	38.9	1
59-841-64	3	24.55	1790	21.35	15.9	38.9	2

All formers are pinned using 0.46mm square wire plated to meet solderability to meet IEC 68-2-20B, Test T. Maximum soldering temperature 400°C , 2 seconds. Pin pull out 2.7N min.

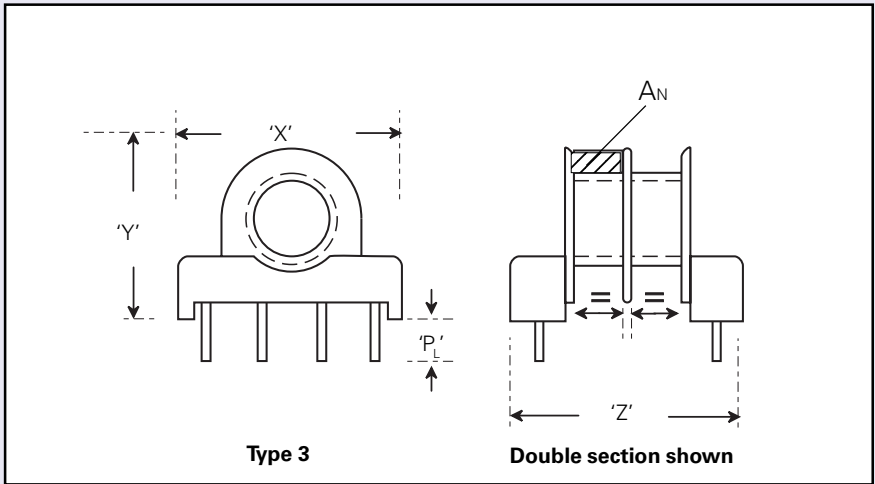

Pin Dimensions					Material
No. of pins*	P ₁	P ₂	P ₃	P _L	
6	2.50	5.00	5.00	3.60	GRF Phenolic
6	2.50	5.00	5.00	3.60	GRF Phenolic
8	2.54	7.62	7.62	4.50	GRF Phenolic
8	2.54	7.62	7.62	4.50	GRF Phenolic
6	3.80	7.60	11.40	3.60	GRF Phenolic
6	3.80	7.60	11.40	3.60	GRF Phenolic
10	2.54	10.16	10.16	4.60	GRF Phenolic
10	2.54	10.16	10.16	4.60	GRF Phenolic
8	5.08	15.24	15.24	3.00	GRF Phenolic
8	5.08	15.24	15.24	3.00	GRF Phenolic
8	5.08	20.32	17.78	5.40	GRF Phenolic
8	5.08	20.32	17.78	5.40	GRF Phenolic

* Other pin configurations can be supplied on request.